




Jan. 13, 1925.

1,523,318

W. UTTON

BEEHIVE COVER

Filed Jan. 9, 1924

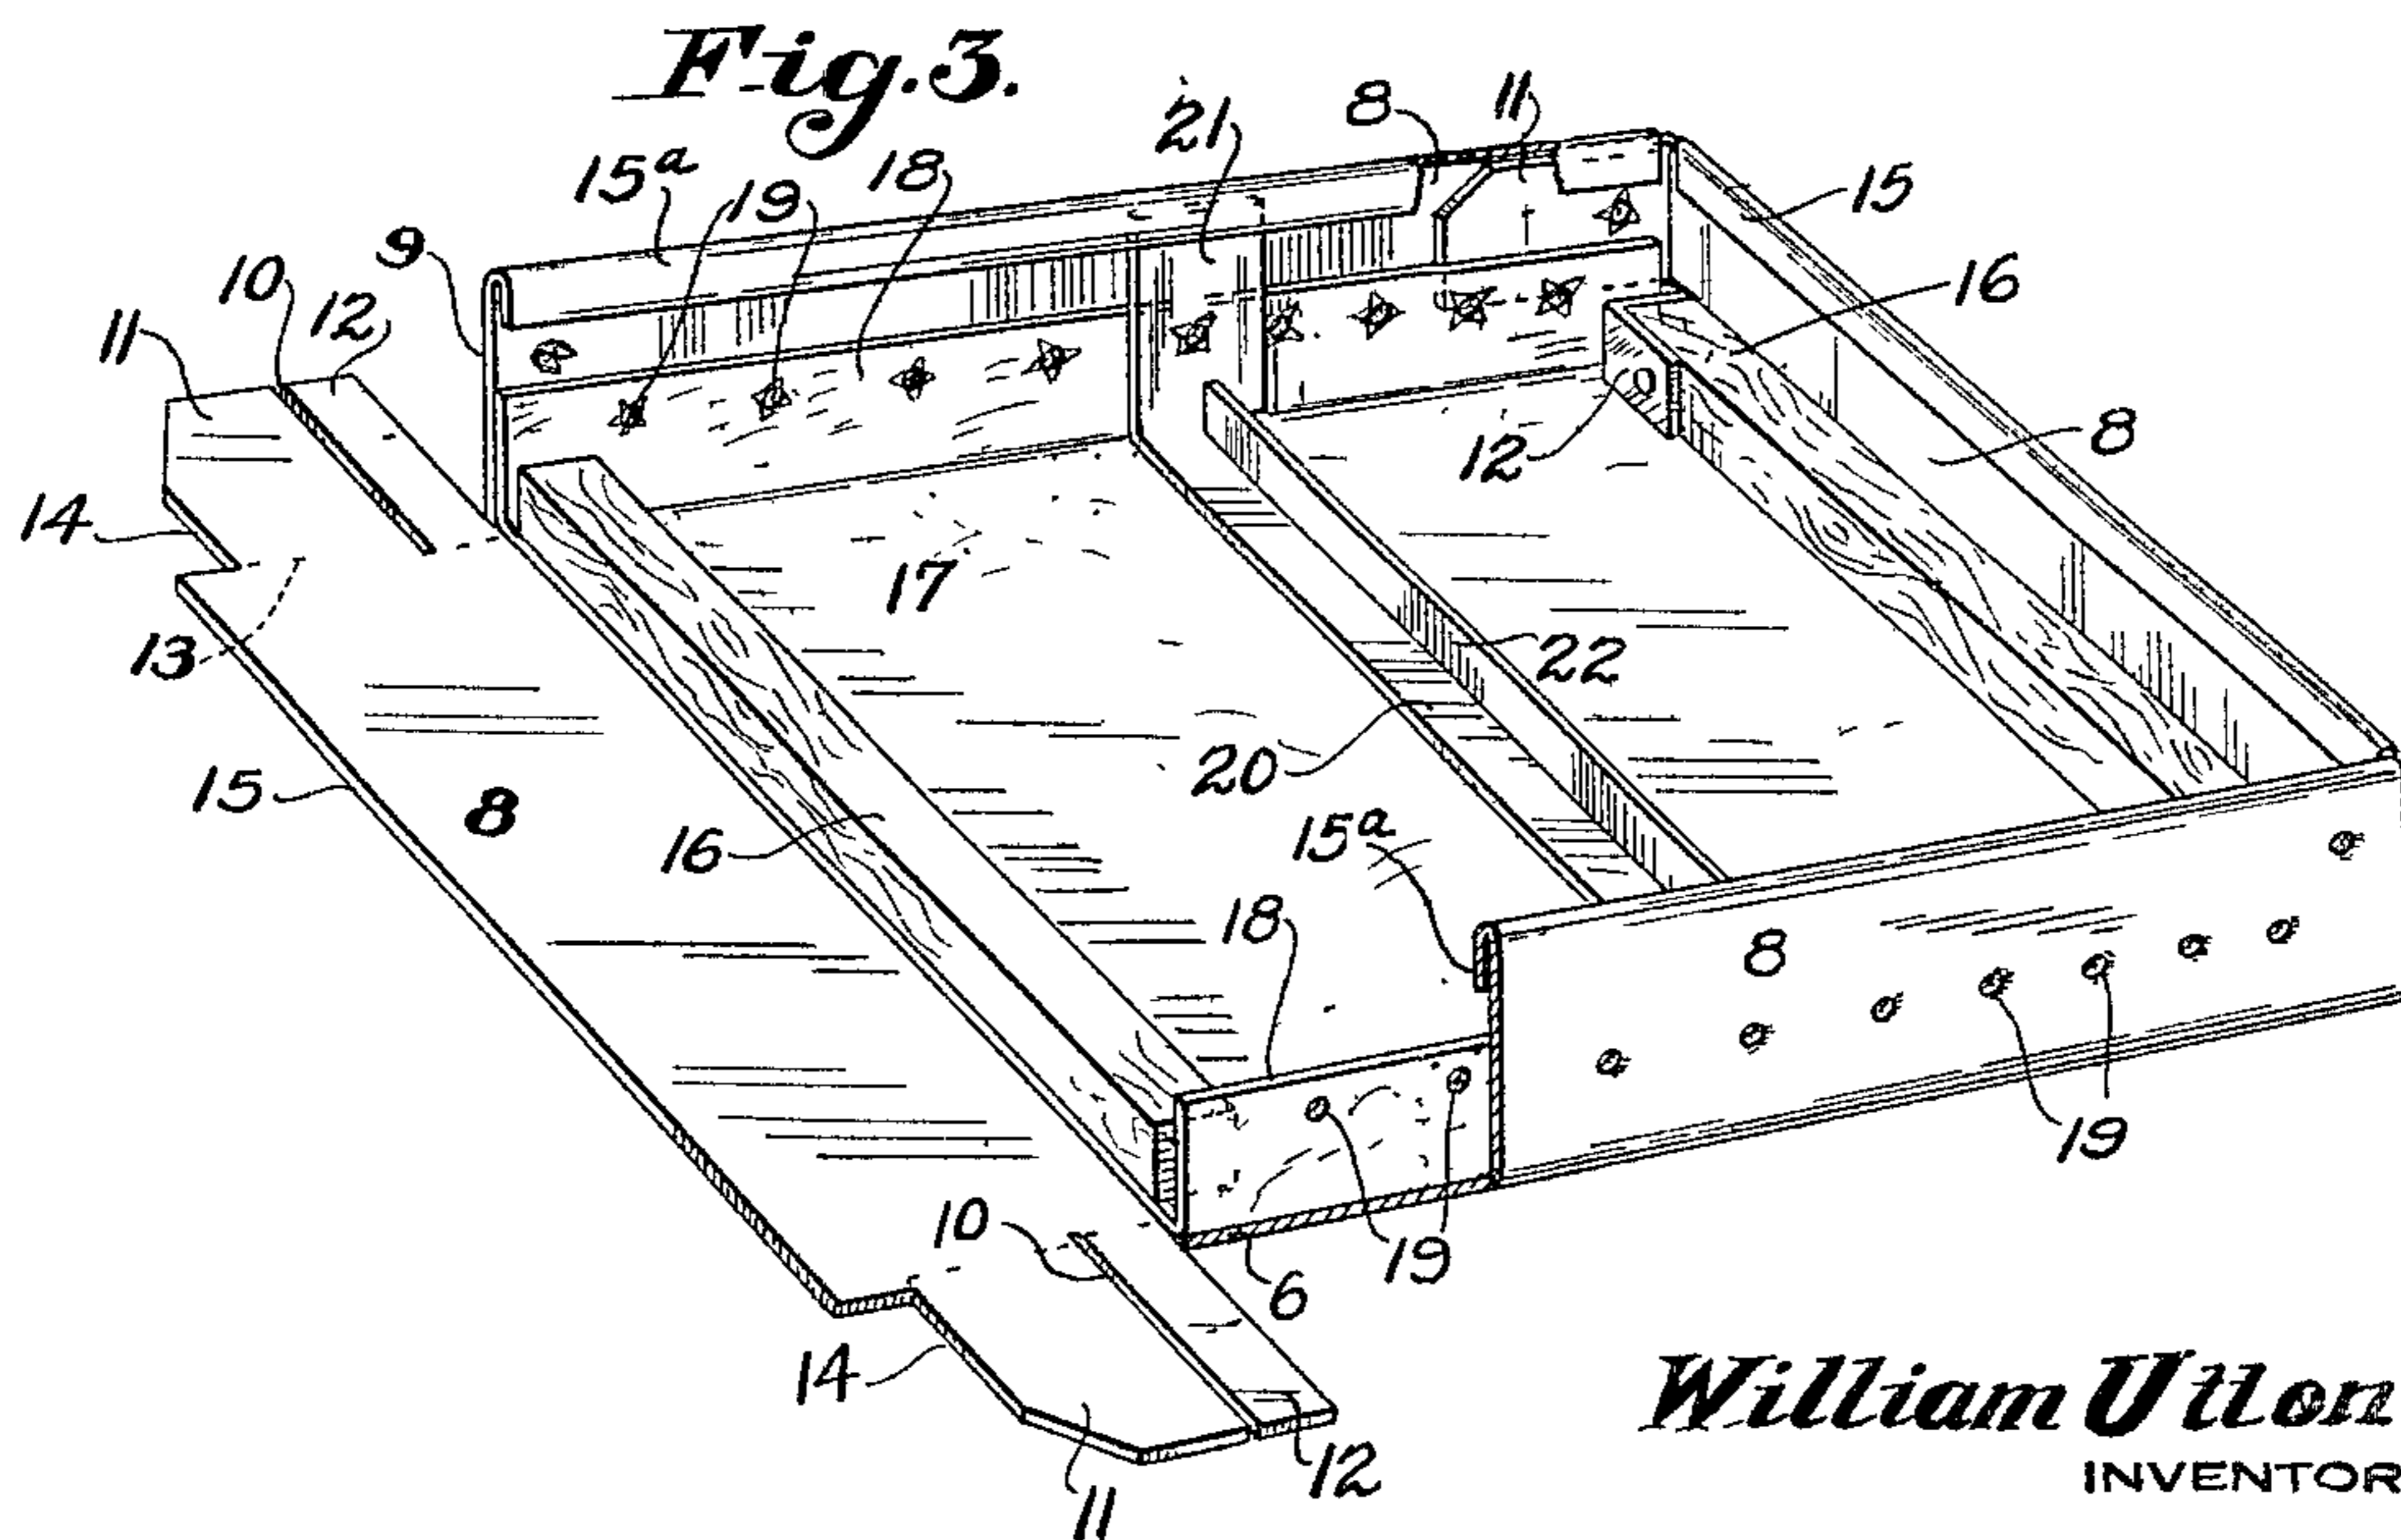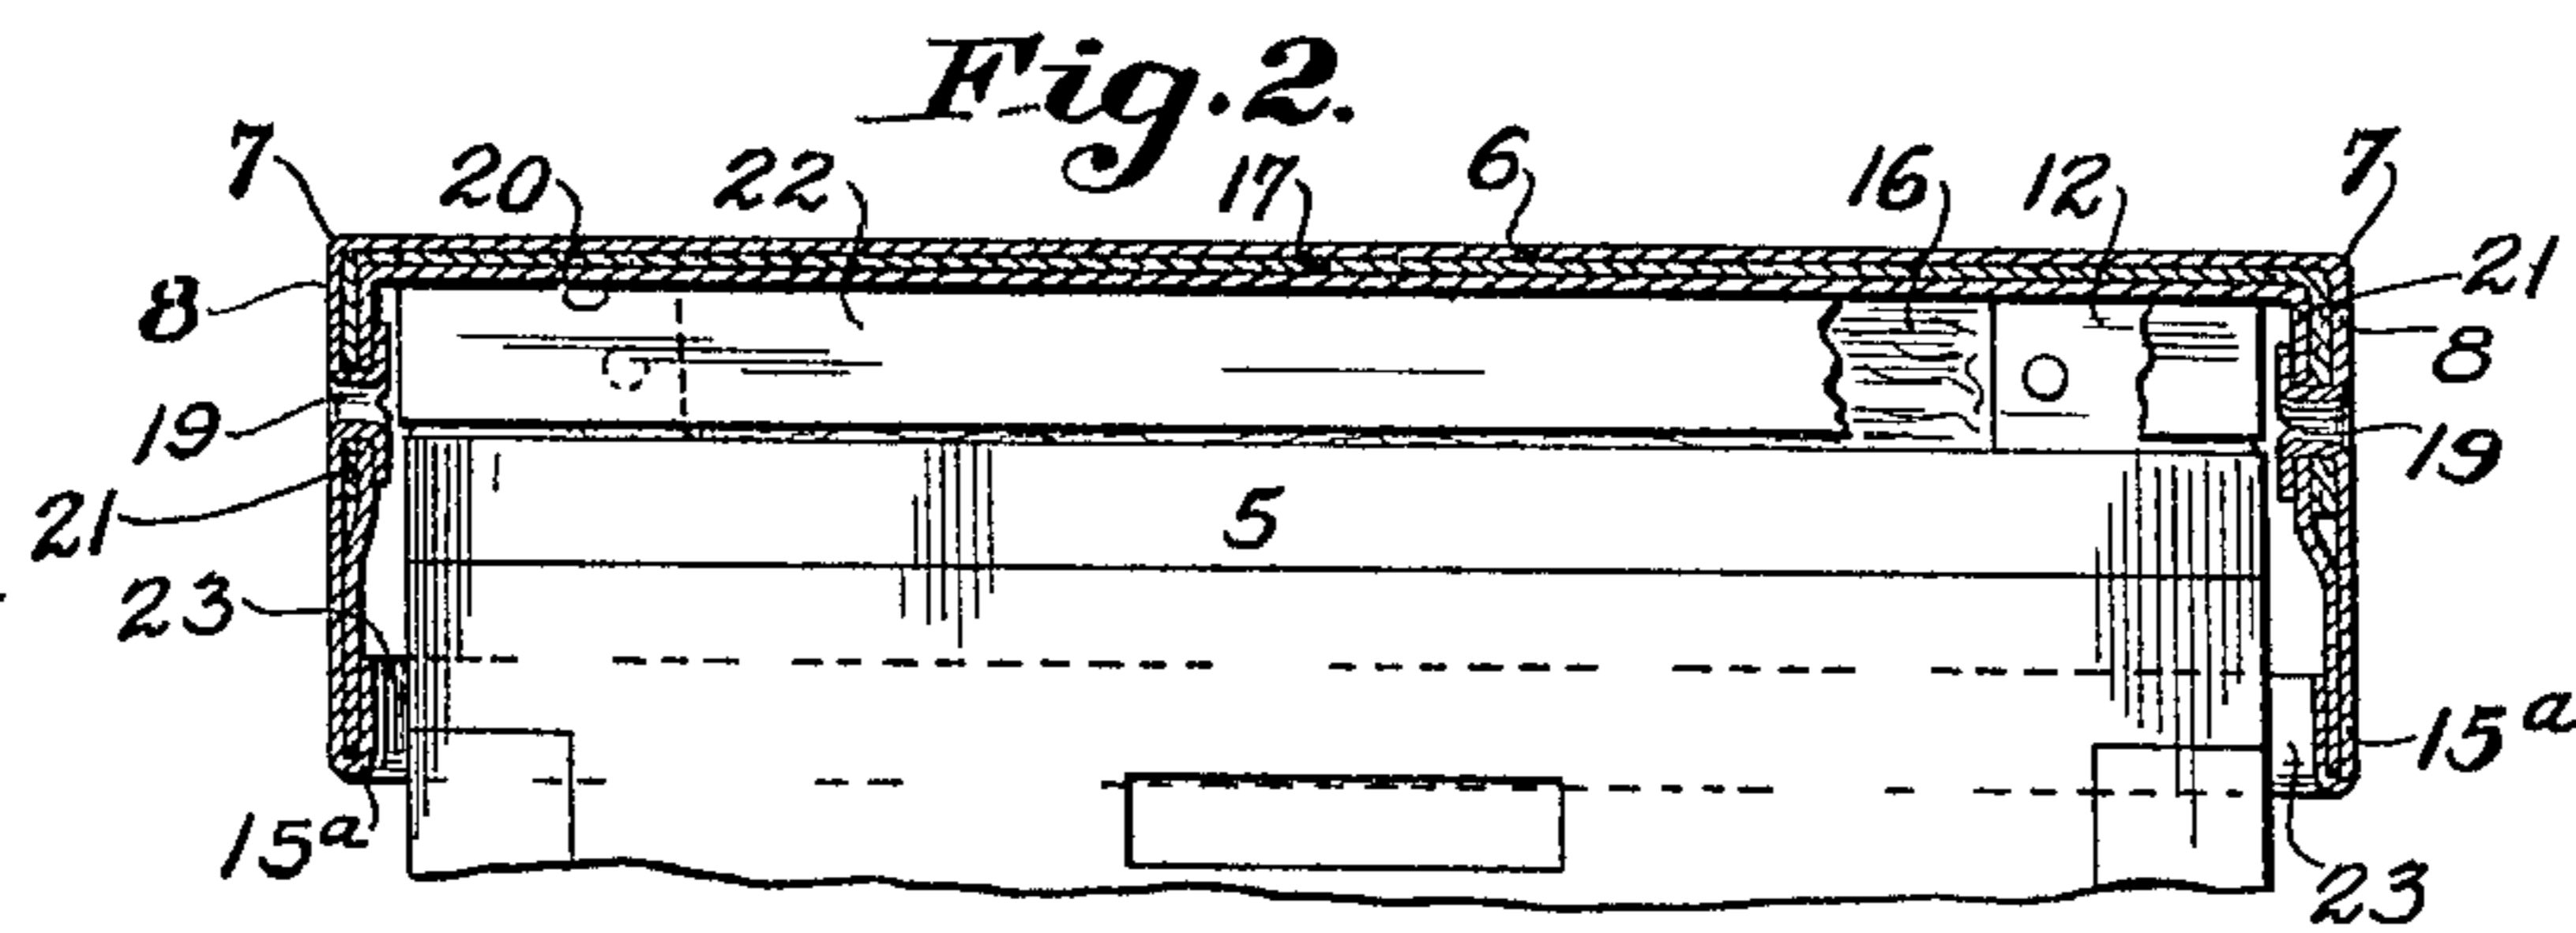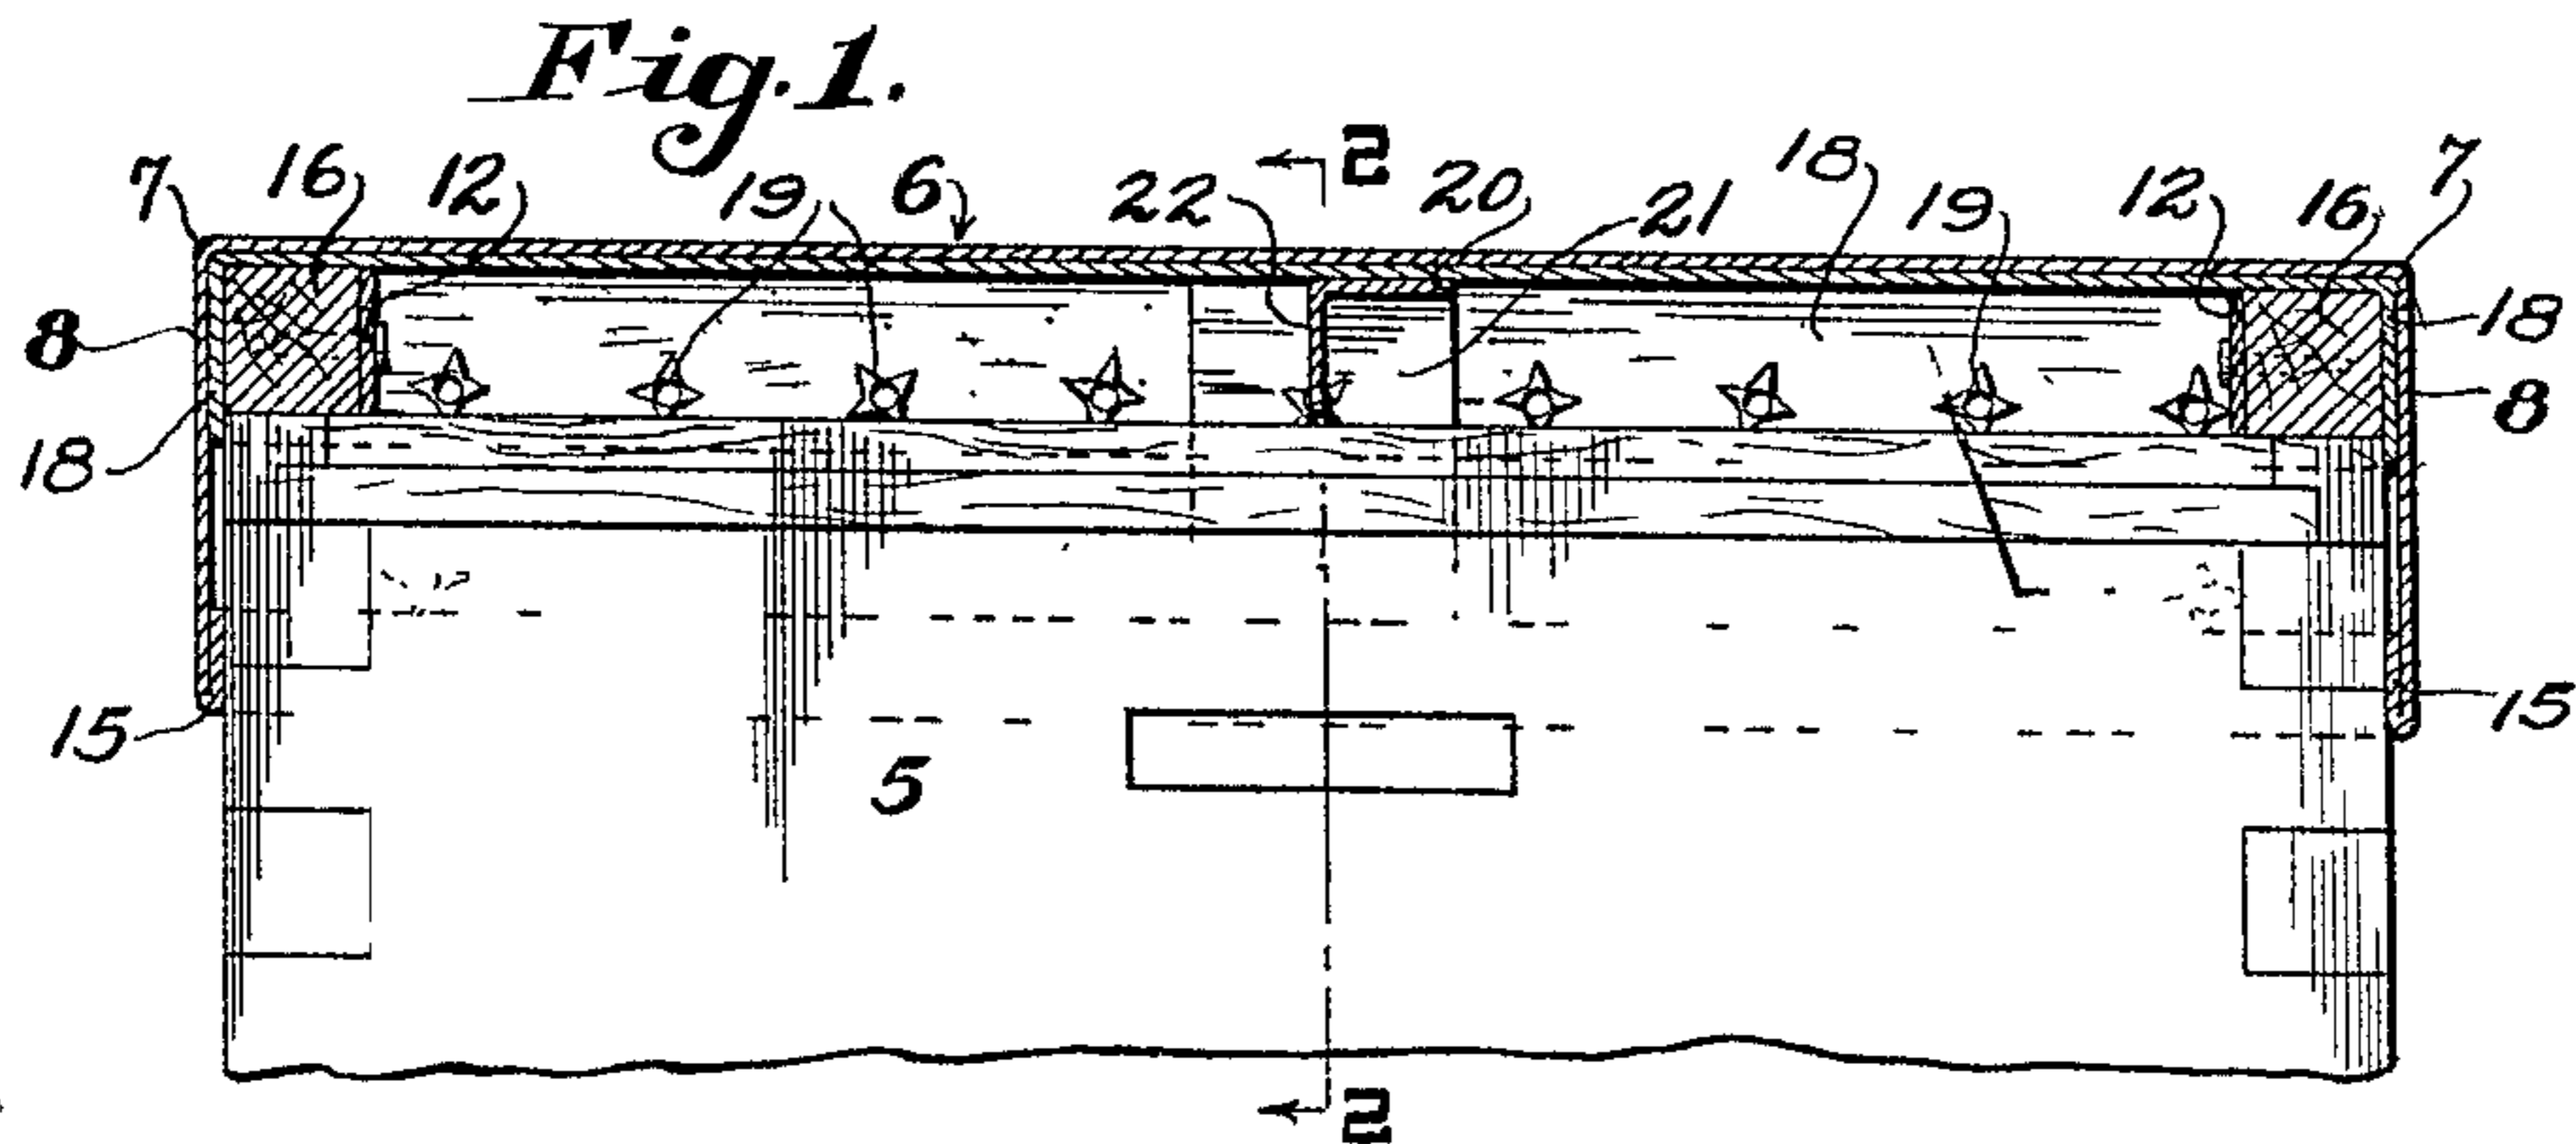

William Utton
INVENTOR

WITNESSES

Louis Goodman
E. N. Lovell

BY

E. G. Siggers

ATTORNEY

UNITED STATES PATENT OFFICE.

WILLIAM UTTON, OF AZTEC, NEW MEXICO

BEEHIVE COVER.

Application filed January 9, 1924. Serial No 625,222

To all whom it may concern:

Be it known that I, WILLIAM UTTON, a citizen of the United States, residing at Aztec, in the county of San Juan and State of New Mexico, have invented a new and useful Beehive Cover, of which the following is a specification.

This invention relates to a cover adapted for beehives of standard construction.

The object of the invention is to provide a strong and durable cover, which is simple and inexpensive to manufacture, and which also provides an improved system of ventilation.

The cover is constructed in such a manner as to leave adequate space for complete ventilation, and is preferably provided with a lining of asbestos, or other suitable material, so that the bees are efficiently protected against the direct heat from the sun's rays. The entire cover, except the lining, may be made from a single blank of sheet metal or pressed steel, which may be stamped out in one operation.

The invention will be more specifically described in connection with the accompanying drawing, which illustrates the same in its preferred form.

In the drawing:

Figure 1 is a vertical section through the cover applied to a beehive, the upper portion of which is shown in elevation.

Figure 2 is a section taken on the line 2-2 of Figure 1

Figure 3 is a perspective view of the underside of the cover detached, showing the manner of its construction.

The numeral 5 indicates the upper portion of a rectangular beehive, of the usual construction. The cover, which is constructed according to my invention, comprises a rectangular sheet of metal 6, with the edges 8 folded along the lines 7 to form the side flanges of the cover. The corners are cut along the lines 9 to permit the side portions to be thus folded, while the corner flaps are slit, as indicated at 10, to form tongues 11 and 12. The cuts 9 are so arranged that two opposite flanges 8 will have tongues 11 and 12 at each end, while the other two flanges 8 are without tongues. Each of the tongues 11 is bent inwardly on the line 13 and attached to the adjacent side flange 8, so as to secure a rigid construction. A portion of each tongue 11 is cut away, as at 14, to form a marginal strip

15, which is folded upon itself to reinforce the edge of the side flange 8 of which the tongue forms a part, while the marginal portions 15^a of the other side flanges are similarly folded. The tongues 12 are angularly bent and secured to the opposite ends of wooden cleats 16, which secure opposite edges of an insulating lining 17 of asbestos, or similar material to the cover. The other edges of the lining 17 preferably extend along the adjacent flanges 8, as indicated at 18, and a series of holes 19 are punched through these flanges, and the burrs thus formed are clinched to secure the portions 18 to the sides of the cover. The lining 17 may be further secured by a metal strip 20, which extends centrally across the inside of the cover and has its end portions 21 secured to the corresponding side flanges 8, while the intermediate portion of the strip 20 may be angularly bent, as at 22, to provide reinforcement.

The cover is so formed that the inturned marginal portions 15 closely engage the sides of the hive, while the marginal portions 15^a of the other two side flanges are slightly spaced from the sides of the hive, as shown at 23, to provide for ventilation. Thus, a complete ventilation is established through the spaces 23 and holes 19, and the burrs surrounding the holes 19 also provide means for firmly attaching the lining to the cover. The asbestos lining in combination with the complete ventilating system provides complete protection for the bees against the sun's heat. It will also be seen that the method of constructing the cover from a single blank of sheet metal enables it to be constructed economically, and also provides a durable construction without the use of solder.

While I have shown and described the specific construction of one form in which the invention may be embodied, it will be understood that this is merely illustrative, and that modifications may be made in the relative size and arrangement of the various parts and certain features may be omitted without departing from the essential principles of the invention as set forth in the claims.

What is claimed is:

1. A cover for beehives or the like made from a rectangular sheet metal blank, with the sides bent up to form side flanges for the cover, a heat insulating lining within

the cover, and cleats for holding the same, each of the corner flaps of the cover being cut to form two tongues, one of which is secured to the adjacent side flange, and the
 5 other of which holds the adjacent end of the cleat.

2. A rectangular metal cover for beehives or the like having peripheral flanges, two opposed flanges being arranged to fit snugly
 10 to the hive, the other two being spaced therefrom and provided with ventilating holes, a heat insulating lining for the cover, said holes being punched to form burrs, and the latter being clinched to secure opposite edges
 15 of the lining.

3. A rectangular metal cover for beehives or the like having peripheral flanges, two opposed flanges being arranged to fit snugly
 20 to the hive, the other two being spaced therefrom and provided with ventilating holes, a heat insulating lining for the cover having downturned opposed edges secured to the last mentioned flanges, strips extending
 25 across the lining at right angles to the flanges of the lining and secured to the cover to retain the intermediate portions of the lining, and to form a reinforcement for the cover.

4. A rectangular metal cover for beehives or the like having peripheral flanges, two
 30 opposed flanges being arranged to fit snugly

to the hive and the other two spaced therefrom and provided with ventilating holes, a heat insulating lining for the cover, said holes being punched to form burrs, the latter
 35 being clinched to secure opposite edges of the lining, cleats extending across the other edges of the lining and across the central portion thereof to retain the intermediate
 40 portions of the lining and to form a reinforcement for the cover, corner flaps integral with the cover, each being cut to form two openings, one of which is secured to the adjacent cover flange, and the other of which
 45 holds the adjacent end of one of said cleats.

5. A rectangular metal cover for beehives or the like having peripheral flanges, two
 45 opposed flanges being arranged to fit snugly to the hive and the other two spaced therefrom and provided with ventilating holes, a heat insulating lining for the cover, said
 50 holes being punched to form burrs, the latter being clinched to secure opposite edges of the lining, cleats extending across the other edges of the lining and across the central
 55 portion thereof to retain the intermediate portions of the lining and to form a reinforcement for the cover.

In testimony, that I claim the foregoing as my own, I have hereto affixed my signature.

WILLIAM UTTON.